AE255 AEROELASTICITY Term paper

Parametric study of the linear dynamics of a cantilevered pipe conveying fluid

G R Krishna Chand Avatar M Tech (Aero) 3^{rd} sem SR No: 05-01-00-10-42-19-1-16558

February 1, 2021

CONTENTS

1	A brief introduction		
2	Hamilton's principle for equation of motion for a cantilevered pipe conveying fluid 1.1 Assumptions	3	
3	inear governing equation for small transverse displacement	8	
	Derivation of the equation of motion 3.1.1 Kinetic energy of the system 3.1.2 Potential energy of the system 3.1.3 Expanding variational terms 3.1.4 Equation of motion 3.1.5 Incorporation of dissipative effects Non-dimensional equation of motion Transformation into modal equation form 3.3.1 Determining system response	9 10 11 13 13 13	
4	Results: Linear analysis of the cantilevered pipe conveying fluid	17	
	Effect of mass ratio β . 4.1.1 Variation of critical flow velocity with mass ratio 2 Effect of gravitational parameter 3 Effect of dissipation . 4.3.1 External dissipation σ 4.3.2 Internal dissipation α 4 Response to velocity impulse input	20 21 21 21 22	
5	Conclusion	27	
\mathbf{A}	Derivation of cantilever beam modal functions	30	



The cantilevered pipe conveying fluid is one of the general class of slender structures (slender implies that the laterial dimension of the structure is much smaller than the longitudinal one) with axial flows. Commonly found examples include fire-hose and garden-hose. A schematic of the cantilevered pipe conveying fluid is shown in fig 1.1.

Despite being of limited application in the field of engineering, the cantilevered pipe conveying fluid problem is now considered to be a model problem in the study of dynamics and stability of structures owing to the following reasons [1]

- it is a simple system and can be modelled by simple equations, all the while possessing rich dynamics
- it possesses a fairly ease of construction which makes it possible to carry out theoretical and experimental investigation simultaneously
- it finds itself amongst a broader class of dynamical systems involving momentum transport of that of axially moving continua (fluid, to be precise)

In this term paper, we are going to evaluate this problem with regard to the influence of various system parameters on linear stability of the problem with sole focus on the occurrence of flutter as the velocity of axial flow through the cantilevered pipe changes.

The term paper is organized in the following manner. We shall apply Hamilton's principle to obtain the equation of motion for the cantilevered pipe system in chapter 2 before moving to the derivation of linear equation of motion in chapter 3. Then, the results obtained for the linear analysis are presented in chapter 4 and finally a conclusion in chapter 5.




Figure 1.1: Schematic of a cantilevered pipe conveying fluid

CHAPTER 2

_HAMILTON'S PRINCIPLE FOR EQUATION OF MOTION FOR A CANTILEVERED PIPE CONVEYING FLUID

2.1 Assumptions

The fundamental assumptions made for the cantilevered pipe and the fluid are

- (a) the fluid is incompressible
- (b) the velocity profile of the fluid is uniform
- (c) the diameter of the pipe is small compared to its length, such that the pipe behaves like an Euler-Bernoulli beam
- (d) the motion is planar (2D)
- (e) the deflections of the pipe are small
- (f) rotatory inertia and shear inertia and shear deformation are neglected
- (g) the pipe centerline is inextensible

2.2 Geometric details

Consider the slender cantilevered pipe in its initial undeformed state with its centerline along X axis (see fig 1.1). We use two coordinate systems to define the system

- Eulerian: (x, z)
- Lagrangian: (x_0, z_0)

For the planar motions in (x, z) plane, the displacements are defined as $u = x - x_0$ and $w = z - z_0 = z$.

Inextensibility condition: Let us consider two points P and Q of the deflected pipe, originally P_o and Q_o . We have

$$(\delta s)^2 = (\delta x)^2 + (\delta z)^2, \qquad (\delta s_0)^2 = (\delta x_0)^2 + (\delta z_0)^2 = (\delta x_0)^2$$

Subtracting the second expression from the first,

$$(\delta s)^{2} - (\delta s_{0})^{2} = (\delta x)^{2} + (\delta z)^{2} - (\delta x_{0})^{2}$$

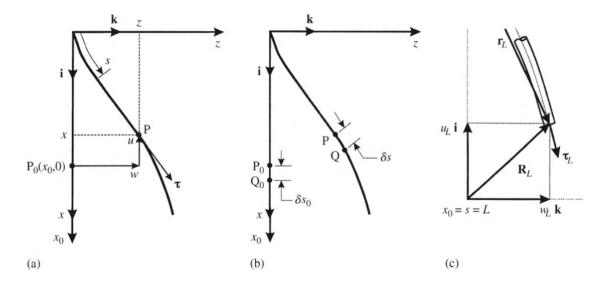


Figure 2.1: (a) Eulerian (x, z) and Lagrangian (x_0, z_0) coordinate systems and the coordinate s when the centerline is taken to be inextensible, (b) for derivation of inextensibility condition, (c) diagram defining terms for the statement of Hamilton's principle

$$= \left[\left(\frac{\partial x}{\partial x_0} \right)^2 + \left(\frac{\partial z}{\partial x_0} \right)^2 - 1 \right] (\delta x_0)^2$$

As $\delta s = \delta s_0 \equiv \delta x_0$, we have the inextensibility condition as

$$\left(\frac{\partial x}{\partial x_0}\right)^2 + \left(\frac{\partial z}{\partial x_0}\right)^2 = 1$$
or,
$$\left(1 + \frac{\partial u}{\partial x_0}\right)^2 + \left(\frac{\partial w}{\partial x_0}\right)^2 = 1$$
(2.1)

In order to make approximations for some expressions later on, we assume that the lateral displacement w is small compared to the pipe length L, that is,

$$\frac{w}{L} \sim \mathcal{O}(\epsilon), \quad \epsilon << 1$$

Using inextensibility condition, binomial approximation and replacing x_0 by s, we can deduce

$$u \simeq -\int_0^s \frac{1}{2} \left(\frac{\partial w}{\partial s}\right)^2 ds, \quad \frac{u}{L} \sim \mathcal{O}(\epsilon^2)$$

2.3 Hamiltonian derivation

We begin with the principle of virtual work for a system of N particles with individual mass m_i subjected to a force \mathbf{F}_i . From d'Alembert's principle

$$\sum_{i=1}^{N} (m_i \ddot{\boldsymbol{r}}_i - \boldsymbol{F}_i) \cdot \delta \boldsymbol{r}_i = 0$$
 (2.2)

with r_i being the position vector of each particle and δr_i the associated virtual displacement satisfying the system constraints (boundary conditions).

Now, consider the second term of equation 2.2

$$\sum_{i=1}^{N} \boldsymbol{F}_{i} \cdot \delta \boldsymbol{r}_{i} = \delta W_{nc} + \delta W_{c}$$

where δW_{nc} is the virtual work due to non-conservative forces while δW_c is that due to conservative forces. Taking $\delta W_{nc} = \delta W$ and $\delta W_c = -\delta V$ (V is the potential energy), we have

$$\sum_{i=1}^{N} \boldsymbol{F}_{i} \cdot \delta \boldsymbol{r}_{i} = \delta W - \delta V$$

Going back to the first term on eqn 2.2,

$$\sum_{i=1}^{N} m_i \ddot{\boldsymbol{r}}_i \cdot \delta \boldsymbol{r}_i = \sum_{i=1}^{N} m_i \frac{\mathrm{d}(\dot{\boldsymbol{r}}_i \cdot \delta \boldsymbol{r}_i)}{\mathrm{d}t} - \sum_{i=1}^{N} \frac{1}{2} m_i \delta(\dot{\boldsymbol{r}}_i \cdot \dot{\boldsymbol{r}}_i)$$
(2.3)

$$= \sum_{i=1}^{N} m_i \frac{\mathrm{d}(\dot{\boldsymbol{r}}_i \cdot \delta \boldsymbol{r}_i)}{\mathrm{d}t} - \delta \underbrace{\sum_{i=1}^{N} \frac{1}{2} m_i (\dot{\boldsymbol{r}}_i \cdot \dot{\boldsymbol{r}}_i)}_{T}$$
(2.4)

$$= \sum_{i=1}^{N} m_i \frac{\mathrm{d}(\dot{\boldsymbol{r}}_i \cdot \delta \boldsymbol{r}_i)}{\mathrm{d}t} - \delta T$$
 (2.5)

with T being the kinetic energy of the system

Substituting the expressions for the corresponding terms in eqn 2.2 gives

$$\sum_{i=1}^{N} m_i \frac{\mathrm{d}(\dot{\boldsymbol{r}}_i \cdot \delta \boldsymbol{r}_i)}{\mathrm{d}t} - \delta T - (\delta W - \delta V) = 0$$

$$\implies \delta(T - V) + \delta W - \sum_{i=1}^{N} m_i \frac{\mathrm{d}(\dot{\boldsymbol{r}}_i \cdot \delta \boldsymbol{r}_i)}{\mathrm{d}t} = 0$$

Let us have the Lagrangian function, $\mathcal{L} = T - V$, such that the above equation becomes

$$\delta \mathcal{L} + \delta W - \sum_{i=1}^{N} m_i \frac{\mathrm{d}(\dot{\boldsymbol{r}}_i \cdot \delta \boldsymbol{r}_i)}{\mathrm{d}t} = 0$$

$$\implies \delta \mathcal{L} + \delta W - \frac{\mathrm{d}}{\mathrm{d}t} \sum_{i=1}^{N} \left(m_i \dot{\boldsymbol{r}}_i \cdot \delta \boldsymbol{r}_i \right) = 0$$
(2.6)

Let us extend this idea to a continuous, closed system associated with a control volume $\mathcal{V}_c(t)$ bounded by a surface $\mathcal{S}_c(t)$, composed of particles of density ρ , each with position vector \mathbf{r} and velocity \mathbf{u} . Applying the principle of virtual work, eqn 2.6

$$\delta \mathcal{L}_c + \delta W - \frac{D}{Dt} \int_{\mathcal{V}_c(t)} \rho(\boldsymbol{u} \cdot \delta \boldsymbol{r}) d\mathcal{V} = 0$$
 (2.7)

where $\mathcal{L}_c = T_c - V_c$ is the Lagrangian function of the closed system, δW is the virtual work due to generalized forces and $\frac{D}{Dt}$ is the material derivative along a particle; hence, $\mathbf{u} = \frac{D\mathbf{r}}{Dt}$. Hamilton's principle can be obtained by integrating the equation 2.7 between two instants, t_1 and t_2 .

$$\int_{t_1}^{t_2} \left[\delta \mathcal{L}_c + \delta W - \frac{D}{Dt} \int_{\mathcal{V}_c(t)} \rho(\boldsymbol{u} \cdot \delta \boldsymbol{r}) d\mathcal{V} \right] dt = 0$$

$$\int_{t_1}^{t_2} \delta \mathcal{L}_c dt + \int_{t_1}^{t_2} \delta W \ dt - \int_{t_1}^{t_2} \frac{D}{Dt} \int_{\mathcal{V}_c(t)} \rho(\boldsymbol{u} \cdot \delta \boldsymbol{r}) d\mathcal{V} \ dt = 0$$

Noting that \mathbf{r} is prescribed at t_1 and t_2 , that is $\delta \mathbf{r} = \mathbf{0}$ resulting in

$$\int_{t_1}^{t_2} \delta \mathcal{L}_c dt + \int_{t_1}^{t_2} \delta W \ dt = 0$$

$$\delta \int_{t_1}^{t_2} \mathcal{L}_c dt + \delta \int_{t_1}^{t_2} W \ dt = 0$$

Extending it to an open system is done by considering a portion $S_o(t)$ of the surface of the control volume $V_o(t)$ to have a velocity $\mathbf{V} \cdot \mathbf{n}$ normal to the surface (\mathbf{n} is the surface normal), across which mass may be transported. Portion $S_c(t)$ corresponds to the closed part. Fig 2.2 shows the system at time t and time t + dt. On the closed portion $S_c(t)$, $\mathbf{V} \cdot \mathbf{n} = \mathbf{u} \cdot \mathbf{n}$.

Should, at time t, $\mathcal{V}_o(t)$, coincides with $\mathcal{V}_c(t)$ as shown in fig 2.2 (a), then Reynolds' general transport theorem states that the total rate of change in $\{\ \}$ is equal to the rate of change in the volume and that due to influx/efflux through the boundaries, that is

$$\frac{\mathrm{d}}{\mathrm{d}t} \int_{\mathcal{V}_{o}(t)} \{ \} d\mathcal{V} = \frac{D}{Dt} \int_{\mathcal{V}_{c}(t)} \{ \} d\mathcal{V} + \int_{\mathcal{S}_{o}} \{ \} (\mathbf{V} - \mathbf{u}) \cdot \mathbf{n} d\mathcal{S}$$
 (2.8)

where

$$\frac{D}{Dt} \int_{\mathcal{V}_c(t)} \{ \} d\mathcal{V} = \frac{D}{Dt} \int_{\mathcal{V}_o(t)} \{ \} d\mathcal{V}$$

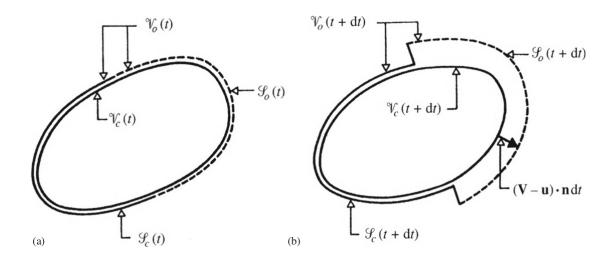


Figure 2.2: Control volume of the open system under consideration, \mathcal{V}_o , and a fictitious closed system \mathcal{V}_c , coincident with \mathcal{V}_o at time t. Control surfaces \mathcal{S}_o and \mathcal{S}_c are associated with the open and closed parts of the open system. (a) System at time t, (b) at time t + dt

Subtituting 2.8 and the above relation into 2.7 gives

$$\delta \mathcal{L}_o + \delta W + \int_{\mathcal{S}_o} \rho(\boldsymbol{u} \cdot \delta \boldsymbol{r}) (\boldsymbol{V} - \boldsymbol{u}) \cdot \boldsymbol{n} d\mathcal{S} - \frac{\mathrm{d}}{\mathrm{d}t} \int_{\mathcal{V}_o(t)} \rho(\boldsymbol{u} \cdot \delta \boldsymbol{r}) d\mathcal{V} = 0$$

where \mathcal{L}_o is the Lagrangian of the open system.

Upon integrating with respect to time from t_1 to t_2 and using $\delta \mathbf{r} = \mathbf{0}$ at the integration limits, we obtain the Hamilton's principle for the open system

$$\delta \int_{t_1}^{t_2} \mathcal{L}_o \ dt + \delta \int_{t_1}^{t_2} W \ dt + \int_{t_1}^{t_2} \left[\int_{\mathcal{S}_o} \rho(\boldsymbol{u} \cdot \delta \boldsymbol{r}) (\boldsymbol{V} - \boldsymbol{u}) \cdot \boldsymbol{n} d\mathcal{S} \right] dt - \int_{t_1}^{t_2} \left[\frac{\mathrm{d}}{\mathrm{d}t} \int_{\mathcal{V}_o(t)} \rho(\boldsymbol{u} \cdot \delta \boldsymbol{r}) d\mathcal{V} \right] dt = 0$$

$$\implies \delta \int_{t_1}^{t_2} \mathcal{L}_o \ dt + \int_{t_1}^{t_2} \left[\delta W + \int_{\mathcal{S}_o} \rho(\boldsymbol{u} \cdot \delta \boldsymbol{r}) (\boldsymbol{V} - \boldsymbol{u}) \cdot \boldsymbol{n} d\mathcal{S} \right] dt = 0$$

$$\implies \delta \int_{t_1}^{t_2} \mathcal{L}_o dt + \delta \int_{t_1}^{t_2} H dt = 0$$
(2.9)

Let us now apply the above equation to a cantilevered pipe conveying a fluid. For the sake of simplicity, we consider the case of no dissipation and a constant flow velocity U. Also it is assumed that the only force involved in δW is due to the pressure p, measured above the ambient of the surrounding medium, (p is gauge pressure) and hence

$$\delta W = -\int_{\mathcal{S}_c(t) + \mathcal{S}_i + \mathcal{S}_e(t)} p(\delta \boldsymbol{r} \cdot \boldsymbol{n}) d\mathcal{S}$$

$$\delta H = -\int_{\mathcal{S}_c(t) + \mathcal{S}_i + \mathcal{S}_e(t)} p(\delta \boldsymbol{r} \cdot \boldsymbol{n}) d\mathcal{S} + \int_{\mathcal{S}_i + \mathcal{S}_e(t)} \rho(\boldsymbol{u} \cdot \delta \boldsymbol{r}) (\boldsymbol{V} - \boldsymbol{u}) \cdot \boldsymbol{n} d\mathcal{S}$$

where $S_c(t)$ is the surface covered by the pipe wall, and S_i (note that S_i is not dependent on t) and $S_e(t)$ are the inlet and exit open surfaces for the fluid.

It is presumed that any virtual displacement of the pipe does not induce a virtual displacement of the fluid relative to the pipe. And so, virtual displacements of the fluid relative to the pipe are independent of those of the pipe. As the fluid is incompressible too, there can be no virtual change in the volume of the system and so, the integral over $S_c(t)$ can be dropped and the above relation becomes

$$\delta H = -\int_{\mathcal{S}_i + \mathcal{S}_e(t)} p(\delta \boldsymbol{r} \cdot \boldsymbol{n}) d\mathcal{S} + \int_{\mathcal{S}_i + \mathcal{S}_e(t)} \rho(\boldsymbol{u} \cdot \delta \boldsymbol{r}) (\boldsymbol{V} - \boldsymbol{u}) \cdot \boldsymbol{n} d\mathcal{S}$$

If the fluid entrance conditions are prescribed and are constant, then the integrals over S_i are zero. Also, since p = 0 at the outlet, the first term vanishes for the above equation

$$\delta H = \int_{\mathcal{S}_e(t)} \rho(\boldsymbol{u} \cdot \delta \boldsymbol{r}) (\boldsymbol{V} - \boldsymbol{u}) \cdot \boldsymbol{n} d\mathcal{S}$$

It would be shown in chapter 3 that $\mathbf{u} = \dot{\mathbf{r}} + U\boldsymbol{\tau}$ where $\mathbf{r} = x\mathbf{i} + z\mathbf{k}$, $\boldsymbol{\tau} = \frac{\partial x}{\partial s}\mathbf{i} + \frac{\partial z}{\partial s}\mathbf{k}$ and () indicates differentiation with respect to t. Also, using $(\mathbf{u} - \mathbf{V}) \cdot \mathbf{n} = U$ at $\mathcal{S}_e(t)$ and $M = \rho A$ (A being the area of the outlet), we have

$$\delta H = -MU(\dot{\boldsymbol{r}}_L + U\boldsymbol{\tau}_L) \cdot \delta \boldsymbol{r}_L$$

Substituting the above relation in eqn 2.9, we have

$$\delta \int_{t_1}^{t_2} \mathcal{L}_o dt - \int_{t_1}^{t_2} MU(\dot{\boldsymbol{r}}_L + U\boldsymbol{\tau}_L) \cdot \delta \boldsymbol{r}_L dt = 0$$
(2.10)

where r_L and τ_L are the position vector and the tangential unit vector at the end of the pipe as seen in fig 2.1 (c).

LINEAR GOVERNING EQUATION FOR SMALL TRANSVERSE DISPLACEMENT

3.1 Derivation of the equation of motion

From eqn 2.10, we have the following

$$\delta \int_{t_1}^{t_2} \mathcal{L}_o \ dt - \int_{t_1}^{t_2} MU(\dot{\boldsymbol{r}}_L + U\boldsymbol{\tau}_L) \cdot \delta \boldsymbol{r}_L dt = 0$$

Let us redefine the Lagrangian of the system, \mathcal{L} (drop the subscript o) in eqn 2.10 as

$$\mathcal{L} = T - V \tag{3.1}$$

where T is the total kinetic energy and V is the total potential energy of the system.

Certain useful relationships

Before we start building expressions for the different terms of eqn 3.1, we derive the following useful relationships

• $u = x - x_o \implies u = x - s$ (as $x_o = s$). Upon differentiating with respect to t, we have

$$\dot{x} = \dot{u}$$

• From inextensibility condition (eqn 2.1), we have

$$\left(\frac{\partial x}{\partial s}\right)^{2} + \left(\frac{\partial z}{\partial s}\right)^{2} = 1$$

$$\implies \frac{\partial x}{\partial s} = \sqrt{1 - \left(\frac{\partial w}{\partial s}\right)^{2}} \quad \text{(as } z = w\text{)}$$

$$\approx 1 - \frac{1}{2} \left(\frac{\partial w}{\partial s}\right)^{2} \quad \left(\text{considering } \frac{w}{L} \sim O(\epsilon)\right)$$

$$= 1 - \frac{1}{2}w'^{2}$$

$$\implies \frac{\partial u}{\partial s} + \underbrace{\frac{\partial s}{\partial s}}_{1} = 1 - \frac{1}{2}w'^{2}$$

$$\implies \frac{\partial u}{\partial s} = -\frac{1}{2}w'^2$$

Upon integrating with respect to s and using the boundary condition u(s=0)=0

$$u(s) = -\frac{1}{2} \int_0^s w'^2 ds$$

- $\bullet \ \dot{\boldsymbol{r}}_L = \dot{x}_L \boldsymbol{i} + \dot{z}_L \boldsymbol{k} = \dot{u}_L \boldsymbol{i} + \dot{w}_L \boldsymbol{k}$
- $\boldsymbol{\tau}_L = x_L' \boldsymbol{i} + z_L' \boldsymbol{k} \approx \left(1 \frac{1}{2} \int_0^L w'^2 ds\right) \boldsymbol{i} + w_L' \boldsymbol{k}$, where prime (') indicates differentiation with respect to s.
- $\delta \boldsymbol{r}_L = \delta u_L \boldsymbol{i} + \delta w_L \boldsymbol{k}$

Using the relationships derived above in the second term of eqn 3.1

$$\begin{split} &\int_{t_1}^{t_2} MU(\dot{\boldsymbol{r}}_L + U\boldsymbol{\tau}_L) \cdot \delta \boldsymbol{r}_L dt \\ &= \int_{t_1}^{t_2} MU \left[\dot{u}_L \boldsymbol{i} + \dot{w}_L \boldsymbol{k} + U \left(1 - \frac{1}{2} \int_0^L w'^2 \ ds \right) \boldsymbol{i} + U w_L' \boldsymbol{k} \right] \cdot \left(\delta u_L \boldsymbol{i} + \delta w_L \boldsymbol{k} \right) \ dt \\ &= \int_{t_1}^{t_2} MU \left[\left(\dot{u}_L + U \left(1 - \frac{1}{2} \int_0^L w'^2 \ ds \right) \right) \delta u_L + \left(\dot{w}_L + U w_L' \right) \delta w_L \right] \ dt \\ &= \int_{t_1}^{t_2} MU \left[\underbrace{\dot{u}_L \delta u_L}_{\text{neglecting}} + \underbrace{U \left(1 - \frac{1}{2} \int_0^L w'^2 \ ds \right)}_{\approx U} \delta u_L + \left(\dot{w}_L + U w_L' \right) \delta w_L \right] \ dt \\ &\approx \int_{t_1}^{t_2} \left[MU^2 \delta u_L + MU \left(\dot{w}_L + U w_L' \right) \delta w_L \right] \ dt \end{split}$$

Substituting this in eqn 3.1 and rearranging, we get

$$\delta \int_{t_1}^{t_2} \mathcal{L} dt - \int_{t_1}^{t_2} \left[MU^2 \delta u_L + MU \left(\dot{w}_L + Uw'_L \right) \delta w_L \right] dt = 0$$

$$\implies \delta \int_{t_1}^{t_2} (\mathcal{L} - MU^2 u_L) dt - \int_{t_1}^{t_2} MU \left(\dot{w}_L + Uw'_L \right) \delta w_L dt = 0$$
(3.2)

3.1.1 Kinetic energy of the system

The total kinetic energy of the system is

$$T = T_p + T_f (3.3)$$

where T_p and T_f are the kinetic energies associated with the pipe and the enclosed fluid.

Let us consider a small segment of pipe and fluid (see fig 2.1). By definition, velocity of the pipe element is

$$\boldsymbol{V}_p = \frac{\partial \boldsymbol{r}}{\partial t} = \dot{x}\boldsymbol{i} + \dot{z}\boldsymbol{k}$$

Velocity of the fluid element is

$$V_f = V_p + U\tau$$

where τ is the tangential unit vector, $\tau = x'i + z'k$. And so,

$$V_f = \dot{x}\mathbf{i} + \dot{z}\mathbf{k} + U(x'\mathbf{i} + z'\mathbf{k}) = (\dot{x} + Ux')\mathbf{i} + (\dot{z} + Uz')\mathbf{k}$$

Kinetic energy of the pipe,

$$T_p = \frac{1}{2}m \int_0^L \mathbf{V}_p \cdot \mathbf{V}_p \ ds = \frac{1}{2}m \int_0^L (\dot{x}^2 + \dot{z}^2) ds$$

where m is the linear mass density of the pipe Kinetic energy of the fluid,

$$T_f = \frac{1}{2}M \int_0^L \mathbf{V}_f \cdot \mathbf{V}_f ds$$

$$= \frac{1}{2}M \int_0^L \left[(\dot{x} + Ux')^2 + (\dot{z} + Uz')^2 \right] ds$$

$$= \frac{1}{2}M \int_0^L \left(\dot{x}^2 + 2U\dot{x}x' + U^2x'^2 + \dot{z}^2 + 2U\dot{z}z' + U^2z'^2 \right) ds$$

$$= \frac{1}{2}M \int_0^L \left(\dot{x}^2 + 2U\dot{x}x' + U^2 \underbrace{(x'^2 + z'^2)}_{=1 \text{ using } 2.1} \dot{z}^2 + 2U\dot{z}z' \right) ds$$

where M is the linear mass density of the fluid. Let us make some approximations

$$\dot{x} \sim O(\epsilon^2)$$

$$x' \approx 1 - \frac{1}{2}w'^2 \approx 1$$

Also as $\dot{x} = \dot{u}$ and z = w,

$$T_p = \frac{1}{2}m \int_0^L \dot{w}^2 ds, \qquad T_f = \frac{1}{2}M \int_0^L \left(U^2 + \dot{w}^2 + 2U\dot{w}w' + 2U\dot{w}w' + 2U\dot{w}\right) ds$$

therefore,

$$T = \frac{1}{2}m \int_0^L \dot{w}^2 ds + \frac{1}{2}M \int_0^L \left(U^2 + \dot{w}^2 + 2U\dot{w}w' + 2U\dot{w}w' + 2U\dot{u}\right) ds$$
 (3.4)

3.1.2 Potential energy of the system

The total potential energy of the system comprises of gravitational energy and strain energy stored in the pipe, and the gravitational energy stored in the fluid, that is

$$V = V_p + V_f$$

In general, gravitational energy of a mass of density ρ immersed in a uniform gravitational field of strength g is given by $G = -\int_{\mathcal{V}} \rho \mathbf{g} \cdot \boldsymbol{\xi} d\mathcal{V}$, where $\boldsymbol{\xi}$ is the position vector of a mass element with respect to some origin.

Potential energy of the pipe is

$$V_p = \frac{1}{2}EI \int_0^L w''^2 ds - mg \int_0^L u \ ds$$

where E is the Young's modulus and I is the area moment of inertia. Substituting $u(s) = -\frac{1}{2} \int_0^s w'^2 ds$ in the above

$$V_p = \frac{1}{2}EI \int_0^L w''^2 ds + \frac{1}{2}mg \int_0^L \left(\int_0^s w'^2 ds \right) ds$$

Similarly, the potential energy of the fluid is

$$V_f = \frac{1}{2} Mg \int_0^L \left(\int_0^s w'^2 ds \right) ds$$

Now.

$$V = \frac{1}{2}EI \int_0^L w''^2 ds + \frac{1}{2}(m+M)g \int_0^L \left(\int_0^s w'^2 ds\right) ds$$

Let us simplify the second term using integration by parts

$$\frac{1}{2}(m+M)g \int_{0}^{L} 1 \cdot \left(\int_{0}^{s} w'^{2} ds \right) ds = \frac{1}{2}(m+M)g \left[s \int_{0}^{s} w'^{2} ds \Big|_{0}^{L} - \int_{0}^{L} sw'^{2} ds \right]
= \frac{1}{2}(m+M)g \left[L \int_{0}^{L} w'^{2} ds - \int_{0}^{L} sw'^{2} ds \right]
= \frac{1}{2}(m+M)g \int_{0}^{L} (L-s)w'^{2} ds$$

The total potential energy of the system is

$$V = \frac{1}{2}EI \int_0^L w''^2 ds + \frac{1}{2}(m+M)g \int_0^L (L-s)w'^2 ds$$
 (3.5)

3.1.3 Expanding variational terms

Expanding the term $\delta \int_{t_1}^{t_2} (\mathcal{L} - MU^2 \delta u_L) dt$ of eqn 3.2, we have

$$\delta \int_{t_1}^{t_2} (\mathcal{L} - MU^2 \delta u_L) \ dt = \delta \int_{t_1}^{t_2} (T - V - MU^2 \delta u_L) \ dt$$
$$= \delta \int_{t_1}^{t_2} T \ dt - \delta \int_{t_1}^{t_2} V \ dt - \delta \int_{t_1}^{t_2} MU^2 \delta u_L \ dt$$

Using eqn 3.4, we have

$$\begin{split} \delta \int_{t_{1}}^{t_{2}} T \ dt &= \int_{t_{1}}^{t_{2}} \left[m \int_{0}^{L} \dot{w} \delta \dot{w} \ ds + M \int_{0}^{L} \left(\dot{w} \delta \dot{w} + U \dot{w} \delta w' + U w' \delta \dot{w} + U \delta \dot{u} \right) \ ds \right] \ dt \\ &= \int_{0}^{L} (m+M) \left(\int_{t_{1}}^{t_{2}} \dot{w} \delta \dot{w} \ dt \right) \ ds + \int_{t_{1}}^{t_{2}} M U \left(\int_{0}^{L} \dot{w} \delta w' \ ds \right) \ dt \\ &+ \int_{0}^{L} M U \left(\int_{t_{1}}^{t_{2}} w' \delta \dot{w} \ dt \right) \ ds + \int_{0}^{L} M U \left(\int_{t_{1}}^{t_{2}} \delta \dot{u} \ dt \right) \ ds \\ &= \int_{0}^{L} (m+M) \left(\dot{w} \delta w \Big|_{t_{1}}^{t_{2}} - \int_{t_{1}}^{t_{2}} \ddot{w} \delta w \ dt \right) \ ds + \int_{t_{1}}^{L} M U \left(\dot{w} \delta w \Big|_{0}^{L} - \int_{0}^{L} \dot{w}' \delta w \ ds \right) \ dt \\ &+ \int_{0}^{L} M U \left(w' \delta w \Big|_{t_{1}}^{t_{2}} - \int_{t_{1}}^{t_{2}} \dot{w}' \delta w \ dt \right) \ ds + \int_{0}^{L} M U \left(\delta u \Big|_{t_{1}}^{t_{2}} \right) \ ds \end{split}$$

From the Hamilton's principle that the variations at $t=t_1$ and $t=t_2$ are zero, we have $\delta w|_{t_1}=\delta w_{t_2}=\delta u|_{t_1}=\delta u|_{t_2}=0$. Using BCs, we have $\delta w|_{s=0}=0$ (clamped at s=0). So,

$$\delta \int_{t_1}^{t_2} T \ dt = -\int_0^L \int_{t_1}^{t_2} (m+M) \ddot{w} \delta w \ dt \ ds - \int_{t_1}^{t_2} \int_0^L 2MU \dot{w}' \delta w \ ds \ dt + \int_{t_1}^{t_2} MU \dot{w}_L \delta w_L \ dt \qquad (3.6)$$

Using equation 3.5, we have

$$\begin{split} \delta \int_{t_1}^{t_2} V \ dt &= \delta \int_{t_1}^{t_2} \left[\frac{1}{2} E I \int_{0}^{L} w''^2 ds + \frac{1}{2} (m+M) g \int_{0}^{L} (L-s) w'^2 \ ds \right] dt \\ &= \int_{t_1}^{t_2} \left[E I \int_{0}^{L} w'' \delta w'' ds + (m+M) g \int_{0}^{L} (L-s) w' \delta w' \ ds \right] dt \\ &= \int_{t_1}^{t_2} E I \left[w'' \delta w' \Big|_{0}^{L} - \int_{0}^{L} w''' \delta w' ds \right] dt \\ &+ \int_{t_1}^{t_2} (m+M) g \left[(L-s) w' \delta w \Big|_{0}^{L} - \int_{0}^{L} ((L-s) w')' \delta w \ ds \right] dt \\ &= \int_{t_1}^{t_2} E I \left[w'' \delta w' \Big|_{0}^{L} - w''' \delta w \Big|_{0}^{L} + \int_{0}^{L} w'''' \delta w ds \right] dt \\ &+ \int_{t_1}^{t_2} (m+M) g \left[(L-s) w' \delta w \Big|_{0}^{L} - \int_{0}^{L} ((L-s) w')' \delta w \ ds \right] dt \end{split}$$

Using the following BCs

$$w(s = 0) = w'(s = 0) = 0; \ w''(s = L) = w'''(s = L) = 0$$

We now have

$$\delta \int_{t_1}^{t_2} V \ dt = \int_{t_1}^{t_2} \int_0^L EIw'''' \delta w \, ds \ dt - \int_{t_1}^{t_2} \int_0^L (m+M)g((L-s)w')' \delta w \ ds \ dt$$
 (3.7)

Expanding the second term in the first integral on the left of eqn 3.2 using the certain useful relations, we have

$$\delta \int_{t_1}^{t_2} MU^2 u_L \ dt = \delta \int_{t_1}^{t_2} MU^2 \left(-\frac{1}{2} \int_0^L w'^2 \ ds \right) \ dt$$

$$= -\int_{t_1}^{t_2} MU^2 \left(\int_0^L w' \delta w' \ ds \right) \ dt$$

$$= -\int_{t_1}^{t_2} MU^2 \left(w' \delta w \Big|_0^L - \int_0^L w'' \delta w \ ds \right) \ dt$$

Using the BC w(s=0)=0, we get

$$\delta \int_{t_1}^{t_2} MU^2 u_L \ dt = -\int_{t_1}^{t_2} MU^2 w_L' \delta w_L \ dt + \int_{t_1}^{t_2} MU^2 \int_0^L w'' \delta w \ ds \ dt \tag{3.8}$$

Substituting the expressions 3.6, 3.7 and 3.8 in eqn 3.2, we have

$$-\int_{0}^{L}\int_{t_{1}}^{t_{2}}(m+M)\ddot{w}\delta w\ dt\ ds - \int_{t_{1}}^{t_{2}}\int_{0}^{L}2MU\dot{w}'\delta w\ ds\ dt + \int_{t_{1}}^{t_{2}}MU\dot{w}_{L}\delta w_{L}\ dt$$

$$-\int_{t_{1}}^{t_{2}} \int_{0}^{L} EIw''''\delta w \, ds \, dt + \int_{t_{1}}^{t_{2}} \int_{0}^{L} (m+M)g((L-s)w')'\delta w \, ds \, dt + \int_{t_{1}}^{t_{2}} \underline{MU^{2}w_{L}^{\prime}\delta w_{L}} \, dt$$

$$-\int_{t_{1}}^{t_{2}} MU^{2} \int_{0}^{L} w''\delta w \, ds \, dt - \int_{t_{1}}^{t_{2}} \underline{MU}(\dot{w}_{L} + Uw_{L}^{\prime}) \, \delta w_{L} \, dt = 0$$

Thus,

$$-\int_{t_1}^{t_2} \int_0^L \left[(m+M)\ddot{w}\delta w + 2MU\dot{w}' + EIw'''' - (m+M)g((L-s)w')' + MU^2w'' \right] \delta w \ ds \ dt = 0$$

3.1.4 Equation of motion

For arbitrary variations in δw and using $s \approx x$, we obtain the equation of motion for the cantilevered pipe conveying fluid

$$(m+M)\ddot{w} + 2MU\dot{w}' + EIw'''' - (m+M)g((L-x)w')' + MU^2w'' = 0$$

$$\implies (m+M)\ddot{w} + 2MU\dot{w}' + EIw'''' + (MU^2 - (m+M)g(L-x))w'' + (m+M)gw' = 0$$
(3.9)

3.1.5 Incorporation of dissipative effects

In order to complete the equations, we must also incorporate dissipative effects into the system [3]. Let us assume that the pipe material is viscoelastic and of the Kelvin-Voigt type (strain-rate damping). For this, the strain energy expression is modified as

$$E \to E \left(1 + a \frac{\partial}{\partial t} \right) \tag{3.10}$$

where a is the coefficient of Kelvin-Voigt damping in the material. Hence, in eqn 3.5, EI is replaced by $EI\left(1+a\frac{\partial}{\partial t}\right)$.

Also, suppose the pipe undergoes damping due to external medium in which it is carrying out its motion, then we have an additional term in the equation

$$c\frac{\partial w}{\partial t}$$
 or $c\dot{w}$

which is the external dissipation term and c is the damping constant.

The governing equation of the cantilevered pipe with both external and internal damping is [2]

$$(m+M)\ddot{w} + 2MU\dot{w}' + c\dot{w} + aEI\dot{w}'''' + EIw'''' + (MU^2 - (m+M)g(L-x))w'' + (m+M)gw' = 0 \quad (3.11)$$

3.2 Non-dimensional equation of motion

Let us now non-dimensionalize the equation 3.11. Denoting the dimensions of mass, length and time by \mathcal{M}, \mathcal{L} and \mathcal{T} respectively, we construct the following time-scale

$$L^{2}\sqrt{\frac{m+M}{EI}} \equiv \mathcal{L}^{2}\sqrt{\frac{\mathcal{M}\mathcal{L}^{-1}}{\mathcal{M}\mathcal{L}^{-1}\mathcal{T}^{-2}\mathcal{L}^{4}}} \equiv \mathcal{T}$$

We also have the following non-dimensional variables

$$\bullet \ \tau = \frac{t}{L^2 \sqrt{\frac{m+M}{EI}}} \equiv \frac{\mathcal{T}}{\mathcal{T}}$$

•
$$\xi = \frac{x}{L} \equiv \frac{\mathcal{L}}{\mathcal{L}}$$

•
$$\eta = \frac{w}{L} \equiv \frac{\mathcal{L}}{\mathcal{L}}$$

Now,

$$t = \tau L^2 \sqrt{\frac{m+M}{EI}}, \quad x = \xi L, \quad w = \eta L$$

Substituting the above expressions in the eqn 3.11, we have

$$(m+M)\frac{\partial^{2}(\eta L)}{\partial\left(\tau L^{2}\sqrt{\frac{m+M}{EI}}\right)^{2}} + 2MU\frac{\partial^{2}(\eta L)}{\partial\left(\tau L^{2}\sqrt{\frac{m+M}{EI}}\right)\partial(\xi L)} + c\frac{\partial(\eta L)}{\partial\left(\tau L^{2}\sqrt{\frac{m+M}{EI}}\right)} + aEI\frac{\partial^{5}(\eta L)}{\partial\left(\tau L^{2}\sqrt{\frac{m+M}{EI}}\right)}\partial(\xi L)^{4}$$

$$+EI\frac{\partial^{4}(\eta L)}{\partial(\xi L)^{4}} + (MU^{2} - (m+M)g(L-\xi L))\frac{\partial^{2}(\eta L)}{\partial(\xi L)^{2}} + (m+M)g\frac{\partial(\eta L)}{\partial(\xi L)} = 0$$

$$\implies \frac{EI}{L^{3}}\ddot{\eta} + \frac{2MU}{L^{2}\sqrt{\frac{m+M}{EI}}}\dot{\eta}' + \frac{c}{L\sqrt{\frac{m+M}{EI}}}\dot{\eta} + \frac{aEI}{L^{5}}\sqrt{\frac{EI}{m+M}}\dot{\eta}'''' + \frac{EI}{L^{3}}\eta'''' + \left(\frac{MU^{2}}{L} - (m+M)g(1-\xi)\right)\eta''$$

$$+(m+M)g\eta' = 0$$

where dot () amd prime (') indicates differentiation with respect to τ and ξ respectively. Multiplying throughout by $\frac{L^3}{EI}$, we have

$$\begin{split} \ddot{\eta} + \frac{2MU}{L^2} \sqrt{\frac{EI}{m+M}} \frac{L^3}{EI} \dot{\eta}' + \frac{c}{L} \sqrt{\frac{EI}{m+M}} \frac{L^3}{EI} \dot{\eta} + \frac{a}{L^2} \sqrt{\frac{EI}{m+M}} \dot{\eta}'''' + \eta'''' \\ + \left(\frac{MU^2}{L} - (m+M)g(1-\xi) \right) \frac{L^3}{EI} \eta'' + \frac{(m+M)gL^3}{EI} \eta' = 0 \end{split}$$

$$\implies \ddot{\eta} + 2\sqrt{\frac{M}{m+M}} \left(\sqrt{\frac{M}{EI}} UL \right) \dot{\eta}' + \left(\frac{cL^2}{\sqrt{EI(m+M)}} \right) \dot{\eta} + \left(\frac{a}{L^2} \sqrt{\frac{EI}{m+M}} \right) \dot{\eta}'''' + \eta'''' + \left[\left(\sqrt{\frac{M}{EI}} UL \right)^2 + \left(\frac{(m+M)gL^3}{EI} \right) (\xi - 1) \right] \eta'' + \left(\frac{(m+M)gL^3}{EI} \right) \eta' = 0$$

We have the following non-dimensional system parameters

•
$$\beta = \frac{M}{m+M} \equiv \frac{\mathcal{M}\mathcal{L}^{-1}}{\mathcal{M}\mathcal{L}^{-1}}$$

•
$$\mathcal{U} = \left(\frac{M}{EI}\right)^{1/2} UL \equiv \left(\frac{\mathcal{M}\mathcal{L}^{-1}}{\mathcal{M}\mathcal{L}^{-1}\mathcal{T}^{-2}\mathcal{L}^4}\right)^{1/2} \mathcal{L}\mathcal{T}^{-1}\mathcal{L}$$

$$\bullet \ \sigma = \frac{cL^2}{\sqrt{EI(m+M)}} \equiv \frac{\mathcal{M}\mathcal{L}^{-1}\mathcal{T}^{-1}\mathcal{L}^2}{\sqrt{\mathcal{M}\mathcal{L}^{-1}\mathcal{T}^{-2}\mathcal{L}^4\mathcal{M}\mathcal{L}^{-1}}}$$

•
$$\alpha = \left(\frac{EI}{m+M}\right)^{1/2} \frac{a}{L^2} \equiv \left(\frac{\mathcal{M}\mathcal{L}^{-1}\mathcal{T}^{-2}\mathcal{L}^4}{\mathcal{M}\mathcal{L}^{-1}}\right)^{1/2} \frac{\mathcal{T}}{\mathcal{L}^2}$$

•
$$\gamma = \frac{m+M}{EI} L^3 g \equiv \frac{\mathcal{M} \mathcal{L}^{-1}}{\mathcal{M} \mathcal{L}^{-1} \mathcal{T}^{-2} \mathcal{L}^4} \mathcal{L}^3 \mathcal{L} \mathcal{T}^{-2}$$

Thus, we have the following non-dimensionalized governing equation

$$\ddot{\eta} + 2\sqrt{\beta}\mathcal{U}\dot{\eta}' + \sigma\dot{\eta} + \alpha\dot{\eta}'''' + \eta'''' + \left[\mathcal{U}^2 - \gamma(1-\xi)\right]\eta'' + \gamma\eta' = 0 \tag{3.12}$$

3.3 Transformation into modal equation form

Let us use Galerkin's method to approximate the solution for eqn 3.12 [2]. We introduce a solution of the form

$$\eta(\xi,\tau) = \sum_{j=1}^{N} q_j(\tau)\phi_j(\xi)$$
(3.13)

where $\phi_j(\xi)$ is the j^{th} modal shape function for the cantilever beam and $q_j(\tau)$ is its corresponding modal coordinate and N is the number of modes considered for approximating the solution.

Substituting the above expression in eqn 3.12, multiplying by $\phi_i(\xi)$ and integrating from $\xi = 0$ to $\xi = 1$ on both sides (also invoking Einstein summation notation)

$$\int_{0}^{1} \phi_{j} \ddot{q}_{j} \phi_{i} d\xi + 2\sqrt{\beta} \mathcal{U} \int_{0}^{1} \phi'_{j} \dot{q}_{j} \phi_{i} d\xi + \sigma \int_{0}^{1} \phi_{j} \dot{q}_{j} \phi_{i} d\xi + \alpha \int_{0}^{1} \phi''''_{j} \dot{q}_{j} \phi_{i} d\xi + \int_{0}^{1} \phi''''_{j} \dot{q}_{j} \phi_{i} d\xi + \int_{0}^{1} \phi''''_{j} \dot{q}_{j} \phi_{i} d\xi + \int_{0}^{1} \phi'''_{j} \dot{q}_{j} \phi_{i} d\xi + \int_{0}^{1} \phi''_{j} \dot{q}_{j} \phi_{i} d\xi +$$

$$\implies \left(\int_0^1 \phi_i \phi_j d\xi\right) \ddot{q}_j + 2\sqrt{\beta} \mathcal{U}\left(\int_0^1 \phi_i \phi_j' d\xi\right) \dot{q}_j + \sigma\left(\int_0^1 \phi_i \phi_j d\xi\right) \dot{q}_j + \alpha\left(\int_0^1 \phi_i \phi_j'''' d\xi\right) \dot{q}_j + \left(\int_0^1 \phi_i \phi_j'''' d\xi\right) q_j + \left[\mathcal{U}^2 + \gamma(\xi - 1)\right] \left(\int_0^1 \phi_i \phi_j'' d\xi\right) q_j + \gamma\left(\int_0^1 \phi_i \phi_j' d\xi\right) q_j = 0 \qquad i, j = 1, 2, \dots, N$$

Using the orthonormal property of the modal shapes, that is, $\int_0^1 \phi_i \phi_j d\xi = \delta_{ij}$ (δ_{ij} is the Kronecker delta function), and $\int_0^1 \phi_i \phi_j'''' d\xi = \lambda_i^4 \delta_{ij}$ where λ_j is the j^{th} eigenfrequency

$$\delta_{ij}\ddot{q}_{j} + \left[2\sqrt{\beta}\mathcal{U}\int_{0}^{1}\phi_{i}\phi_{j}'d\xi + \sigma\delta_{ij} + \alpha\lambda_{j}^{4}\delta_{ij}\right]\dot{q}_{j} + \left[\lambda_{j}^{4}\delta_{ij} + \left[\lambda_{j}^{4}\delta_{ij} + \left[\lambda_{j}^{4}\delta_{ij}\right] + \mathcal{U}^{2} + \gamma(\xi - 1)\int_{0}^{1}\phi_{i}\phi_{j}''d\xi + \gamma\int_{0}^{1}\phi_{i}\phi_{j}'d\xi\right]q_{j} = 0 \qquad i, j = 1, 2, \dots, N$$

Upon rearranging, we get

$$\delta_{ij}\ddot{q}_{j} + \left[2\sqrt{\beta}\mathcal{U}\underbrace{\int_{0}^{1}\phi_{i}\phi'_{j}d\xi}_{b_{ij}} + (\sigma + \alpha\lambda_{j}^{4})\delta_{ij}\right]\dot{q}_{j} + \left[\lambda_{j}^{4}\delta_{ij} + (\mathcal{U}^{2} - \gamma)\underbrace{\int_{0}^{1}\phi_{i}\phi''_{j}d\xi}_{c_{ij}}\right] + \gamma\underbrace{\int_{0}^{1}\xi\phi_{i}\phi''_{j}d\xi}_{b_{ij}} + \gamma\underbrace{\int_{0}^{1}\phi_{i}\phi'_{j}d\xi}_{b_{ij}}\right]q_{j} = 0 \qquad i, j = 1, 2, \dots, N$$

where

$$b_{ij} = \int_0^1 \phi_i \phi_j' d\xi \qquad c_{ij} = \int_0^1 \phi_i \phi_j'' d\xi \qquad d_{ij} = \int_0^1 \xi \phi_i \phi_j'' d\xi$$

Now.

$$\underbrace{\delta_{ij}}_{M_{ij}} \ddot{q}_j + \underbrace{\left[2\sqrt{\beta}\mathcal{U}b_{ij} + (\sigma + \alpha\lambda_j^4)\delta_{ij}\right]}_{C_{ij}} \dot{q}_j + \underbrace{\left[\lambda_j^4\delta_{ij} + (\mathcal{U}^2 - \gamma)c_{ij} + \gamma d_{ij} + \gamma b_{ij}\right]}_{K_{ij}} q_j = 0 \qquad i, j = 1, 2, \dots, N$$
(3.14)

where M_{ij} , C_{ij} and K_{ij} are the components of mass (\mathbf{M}) , damping (\mathbf{C}) and stiffness (\mathbf{K}) matrices respectively. It is to be noted that $\mathbf{M} = \mathbf{I}$ (an identity matrix).

$$\implies M_{ij}\ddot{q}_i + C_{ij}\dot{q}_j + K_{ij}q_j = 0 \qquad i, j = 1, 2, \dots, N$$

In matrix form, we have

$$I\ddot{q} + C\dot{q} + Kq = 0 \tag{3.15}$$

Taking $z = \dot{q}$, the matrix equation can be expressed in terms of two vector equations

$$\dot{m{q}} = m{z}$$
 $\dot{m{z}} = -m{K}m{q} - m{C}m{z}$

which can also be represented as

$$\underbrace{ \begin{bmatrix} \dot{q} \\ \dot{z} \end{bmatrix}}_{\dot{x}} = \underbrace{ \begin{bmatrix} 0 & I \\ -K & -C \end{bmatrix}}_{A} \underbrace{ \begin{bmatrix} q \\ z \end{bmatrix}}_{x}$$

Thus we have the following state space equation

$$\dot{\boldsymbol{x}} = \boldsymbol{A}\boldsymbol{x} \tag{3.16}$$

Introducing a solution of the form $\mathbf{x}(\tau) = \mathbf{x}_0 e^{i\omega\tau}$, where ω is complex frequency, that is, $\omega = \Re(\omega) + i \Im(\omega)$

$$i\omega \boldsymbol{x}_0 e^{i\omega \tau} = \boldsymbol{A} \boldsymbol{x}_0 e^{i\omega \tau}$$

 $\Rightarrow (i\omega \boldsymbol{I} - \boldsymbol{A}) \, \boldsymbol{x}_0 = \boldsymbol{0}$

For non-trivial solution $x_0 \neq 0$, we must have

$$\det(i\omega \boldsymbol{I} - \boldsymbol{A}) = 0$$

which would give us the eigenvalues ω . The real part $(\Re(\omega))$ of ω is the oscillation frequency of the cantilevered pipe system while the imaginary part $(\Im(\omega))$ is an indicator of growth or decay of the amplitude of the oscillation. If $\Im(\omega) > 0$, the corresponding modal oscillation decays (system is stable) while $\Im(\omega) < 0$ indicates that the corresponding modal oscillation amplifies (system becomes unstable). The system is said to undergo flutter when $\Im(\omega)$ becomes zero; the corresponding fluid velocity for the given set of parameters β, γ, α and σ is called flutter flow velocity \mathcal{U}_f . Physically, flutter is a self-excited oscillation wherein a system develops a steady oscillatory motion of finite amplitude and constant frequency. Mathematically, it is defined as a Hopf bifurcation [3].

3.3.1 Determining system response

In order to determine the system response, two initial conditions (ICs) are required: for displacement $\eta(\xi,0) = \eta_0(\xi)$ and for velocity $\dot{\eta}(\xi,0) = \dot{\eta}_0(\xi)$. The modal coordinates for displacement \boldsymbol{q} and velocity $\dot{\boldsymbol{q}}$ are obtained by projecting the given ICs on the Galerkin modes and using the orthonormality property of the modal shape functions [4]

$$q_{j} = \int_{0}^{1} \eta_{0}(\xi)\phi_{j}(\xi) d\xi \qquad j = 1, 2, \dots, N$$
$$\dot{q}_{j} = \int_{0}^{1} \dot{\eta}_{0}(\xi)\phi_{j}(\xi) d\xi$$

CHAPTER 4

RESULTS: LINEAR ANALYSIS OF THE CANTILEVERED PIPE CONVEYING FLUID

The linear analysis for the cantilevered pipe conveying fluid system has been performed taking N=10 Galerkin modes to get as accurate an approximation of the system as possible. Let us study the effect of the various parameters β , γ , α and σ on the system's stability and also flutter flow velocity \mathcal{U}_f .

4.1 Effect of mass ratio β

Let us consider a horizontal system with all dissipation effects neglected, such that the system parameters $\alpha = \gamma = \sigma = 0$, and it depends only on β . The variation of complex frequency ω with flow velocity \mathcal{U} for different mass ratios are presented in the figures 4.1, 4.2 and 4.3. We make the following observations

- For small \mathcal{U} , all the coupled modes experience damping, that is, $\Im(\omega) > 0$ for every mass ratio $\beta = 0.2, 0.295, 0.5$ presented here. At higher \mathcal{U} , $\Im(\omega)$ of at least one mode begins to decrease and eventually crosses zero to the negative side and so, the system becomes unstable due to flutter. This mechanism of the solution of the system changing its nature is called Hopf bifurcation.
- For $\beta = 0.2$, $\Im(\omega)$ of the second and fourth modes becomes negative as \mathcal{U} crosses ~ 5.58 and ~ 13.2663 respectively. For $\beta = 0.295$, $\Im(\omega)$ of the second mode becomes negative as \mathcal{U} crosses ~ 7.24 . For $\beta = 0.5$, $\Im(\omega)$ of the third mode becomes negative as \mathcal{U} crosses ~ 9.27 . One thing to note about $\beta = 0.295$ is that the second mode crosses over to the positive imaginary region for $7.24 < \mathcal{U} < 8$ and then re-enters the negative imaginary region. In this process, the system becomes unstable, regains its stability and loses it again; the system dynamics forming the so-called 'instability-restabilization-instability' sequence [3].
- Mode exchange: It is to be noted that the second coupled modes for $\beta = 0.2, 0.295$ bend downwards into the negative imaginary axis while the third mode is continuously marching along the positive imaginary axis. However, an opposite facet is observed for $\beta = 0.5$ where its second mode lies in the positive imaginary region while its third mode moves into the negative imaginary axis. This phenomenon of two modes exchanging their nature is called "mode exchange" [5] [3].
- The details regarding the primary coupled flutter mode number for a particular value of mass ratio β and its corresponding flutter flow velocity \mathcal{U}_f are tabulated in table 4.1. The primary flutter mode is the second one for $0 < \beta < 0.4$, the third one for $0.4 \le \beta < 0.55$, the second one for $0.55 \le \beta \le 0.6$ and eventually the first mode for $0.6 < \beta < 1$.

Table 4.1: Primary flutter coupled mode and flutter flow velocity for various mass ratios

Mass ratio	Primary flutter	Flutter flow velocity
β	coupled mode	\mathcal{U}_f
0.1	Second	4.7487
0.2	Second	5.5779
0.295	Second	7.2362
0.3	Second	8.2161
0.35	Second	8.5176
0.4	Third	8.7437
0.5	Third	9.2714
0.55	Second	9.6321
0.6	Second	9.9497
0.65	First	10.3846
0.7	First	12.7387
0.8	First	13.4925
0.9	First	14.3216

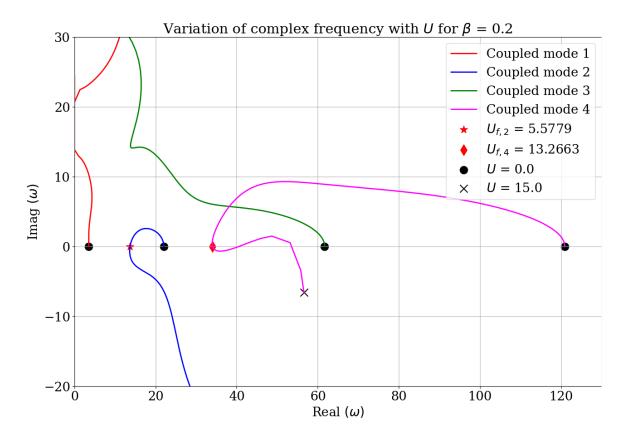


Figure 4.1: Variation of complex frequency ω with non-dimensional flow velocity \mathcal{U} for $\beta = 0.2$; the flow velocity where a mode undergoes flutter (\mathcal{U}_f) is marked.

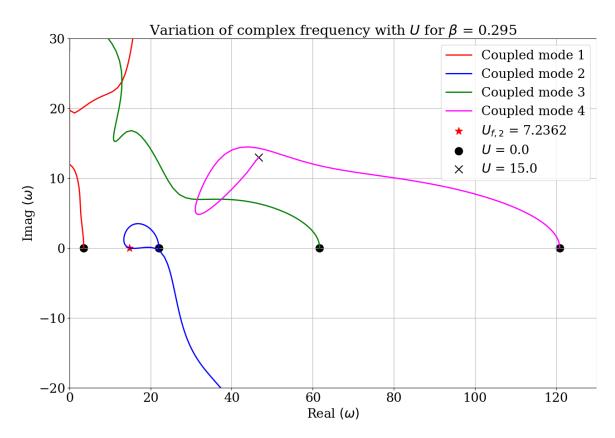


Figure 4.2: Variation of complex frequency ω with non-dimensional flow velocity \mathcal{U} for $\beta = 0.295$; the flow velocity where a mode undergoes flutter (\mathcal{U}_f) is marked.

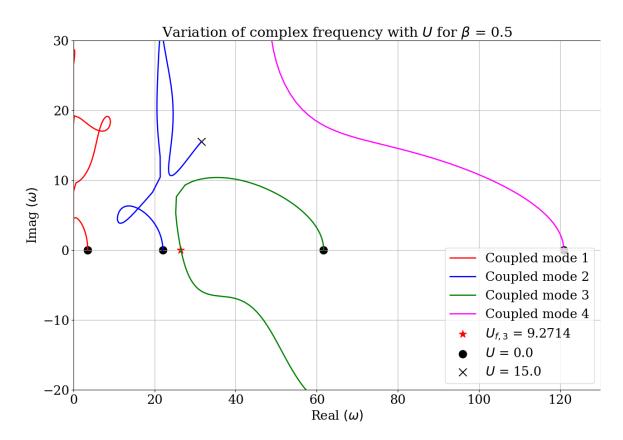


Figure 4.3: Variation of complex frequency ω with non-dimensional flow velocity \mathcal{U} for $\beta = 0.5$; the flow velocity where a mode undergoes flutter (\mathcal{U}_f) is marked.

4.1.1 Variation of critical flow velocity with mass ratio

The variation of the primary critical flow velocity or flutter flow velocity \mathcal{U}_f and the corresponding flutter frequency ω_f is plotted against mass ratio β in fig 4.4. (The determination of \mathcal{U}_f versus β curve is done by fixing a \mathcal{U}_f and then looping β over 0 to 1.) The \mathcal{U}_f and ω_f curves is composed of a set of S-shaped segments. It is also observed that for a particular β , there could be two flutter flow velocities, somewhat similar to what was observed for the dynamics of the second mode for $\beta = 0.295$.

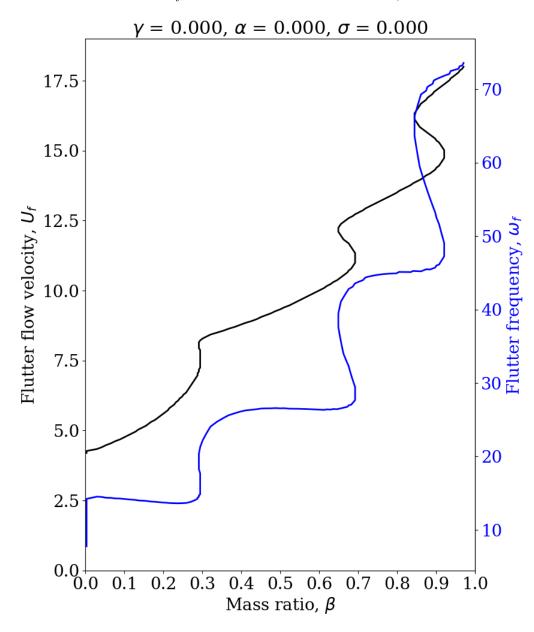


Figure 4.4: Variation of critical non-dimensional flow velocity \mathcal{U}_f with mass ratio β

4.2 Effect of gravitational parameter

The study of the effect of gravity ($\gamma \neq 0$) is driven by the need to investigate the system dynamics of a vertical cantilevered pipe. For a horizontal system, gravitational force produces an initial deformation which then can be neglected while performing linear analysis. Given that $\gamma = \frac{(M+m)gL^3}{EI}$, for metal pipes conveying fluid, γ is small except when L is very large and so the effect on the dynamics may be neglected, however, for rubber or elastomer pipes, E is relatively lower and so the gravity effects are non-negligible. For different values of gravitational parameter γ while neglecting dissipation effects, the variation of flutter flow velocity \mathcal{U}_f with mass ratio β is shown in fig 4.5. It is apparent that as γ increases, the flutter flow velocity increases for any β . This suggests that higher γ could make a system more stable.

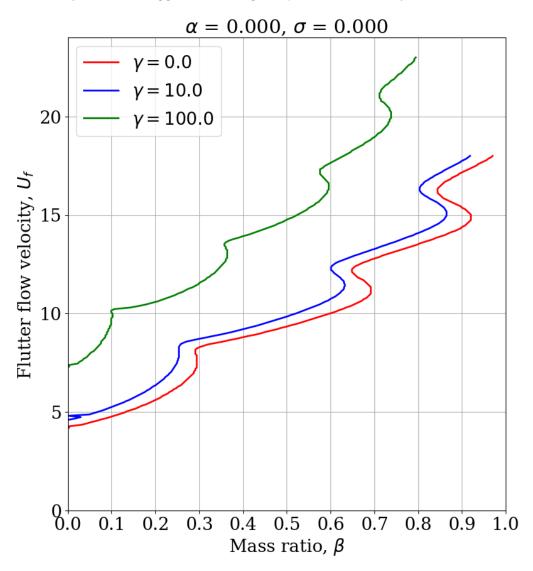


Figure 4.5: Variation of flutter flow velocity with mass ratio for different values of gravitational parameter.

4.3 Effect of dissipation

4.3.1 External dissipation σ

The effect of external dissipation $\sigma\left(=\frac{cL^2}{\sqrt{EI(m+M)}}\right)$ on the dynamics of the system is presented in fig 4.6 with $\alpha=\gamma=0$. High values of σ would be encountered when a pipe (for example rubber or elastomeric

pipe) is immersed in water or any other more viscous fluid [3]. We observe the following in fig 4.6

- For mass ratio $\beta < 0.3$, the flutter flow velocity \mathcal{U}_f increases with σ . This implies that for smaller β , higher σ enhances the system's stability.
- In the interval $0.3 \le \beta < 0.5$, we do not find any significant effect of σ on the system dynamics.
- When $\beta \geq 0.5$, higher σ no longer contributes to the system stability, rather it plays an active role in destabilizing the system.

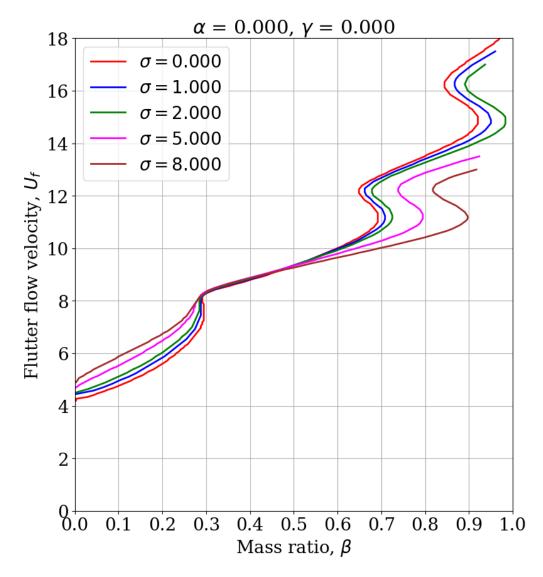


Figure 4.6: Variation of flutter flow velocity with mass ratio for different σ .

4.3.2 Internal dissipation α

The variation of flutter flow velocity frequency \mathcal{U}_f with mass ratio β for the Kelvin-Voigt dissipation parameter $\alpha = 0.0, 0.001, 0.002, 0.003$ with $\gamma = 0.0$ and $\sigma = 0$ is shown in fig 4.7. Due to the system being very sensitive to α , analysis for higher α could not be done. The reason behind this is that α is multiplied by the fourth power of eigenvalue λ_j as can be seen in eqn 3.14. The eigenvalues range from $\lambda_1 = 1.8751$ to $\lambda_{10} = 29.8451$ for the first 10 modes and therefore, the corresponding fourth powers are quite high. Similar to what was observed in the case of external dissipation, fig 4.7 leads us to the following observations

- In the range $0 < \beta < 0.28$, higher value of α improves the system's stability.
- For a brief interval $0.28 < \beta < 0.35$ and then $\beta > 0.6$, higher value of α deteriorates the system stability by bringing \mathcal{U}_f down.
- No significant effect of α on the system stability is seen for $0.35 < \beta \le 0.6$.

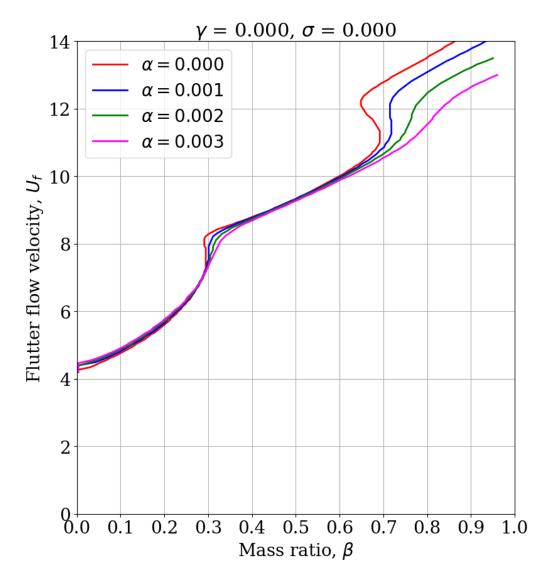


Figure 4.7: Variation of \mathcal{U}_f with mass ratio β for various α

4.4 Response to velocity impulse input

Point displacement history Let us subject the cantilevered system to the following velocity impulse input

$$\dot{\eta} \ (\xi, \tau = 0) = 0.2 \ \delta(\xi - 1)$$

and zero initial displacement, $\eta(\xi, \tau = 0) = 0$. The velocity impulse input excites all the frequencies in the system with equal magnitude. The displacement history for a point located at the tip of the cantilevered system $\xi = 1$ is shown for two different \mathcal{U} - one prior to the occurrence of flutter and the other post flutter - for $\beta = 0.2$ (see fig 4.1) and $\gamma = \sigma = \alpha = 0$ in figs 4.8 and 4.9 respectively.

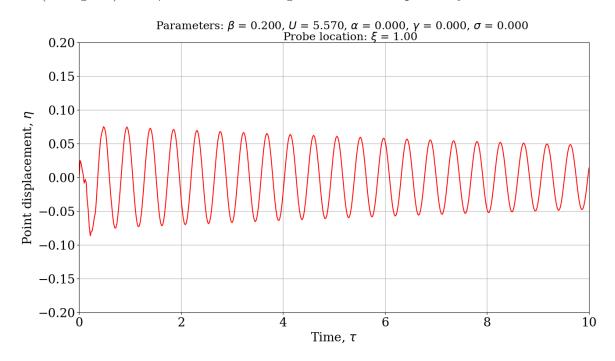


Figure 4.8: Displacement history of a point located at the tip for $\beta = 0.2$, $\mathcal{U} = 5.57$

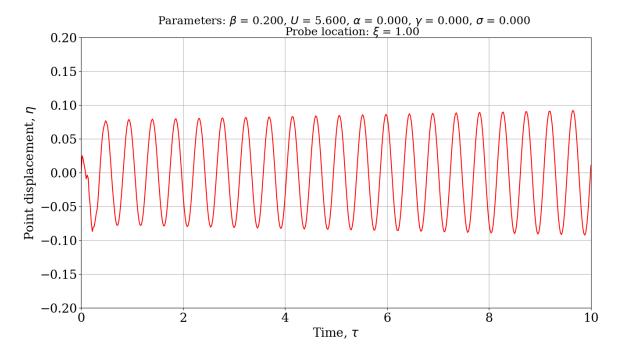


Figure 4.9: Displacement history of a point located at the tip for $\beta = 0.2$, $\mathcal{U} = 5.6$

It is apparent that the case corresponding to \mathcal{U} prior to the onset of flutter sees its oscillating mean displacement decaying with time while the one post flutter sees its oscillating mean displacement growing in time.

Energy dynamics In order to assess the energy dynamics, we construct an expression for the instantaneous "kinetic energy" of the system which is given by

$$T(\tau) = \frac{1}{2} \int_0^1 \dot{\eta}^2(\xi, \tau) \ d\xi$$

Upon substituting $\eta(\xi,\tau) = \sum_{j=1}^{N} q_j(\tau)\phi_j(\xi)$ from eqn 3.13 in the above equation and using the orthonormality property of the modal shape functions, we have

$$T(\tau) = \frac{1}{2} \int_{0}^{1} \left(\sum_{i=1}^{N} \dot{q}_{i}(\tau) \phi_{i}(\xi) \right) \left(\sum_{j=1}^{N} \dot{q}_{j}(\tau) \phi_{j}(\xi) \right) d\xi$$

$$= \frac{1}{2} \sum_{i=1}^{N} \sum_{j=1}^{N} \dot{q}_{i} \delta_{ij} \dot{q}_{j}$$

$$\implies T(\tau) = \frac{1}{2} \dot{\boldsymbol{q}}^{T} \boldsymbol{M} \dot{\boldsymbol{q}}$$

$$(4.1)$$

where the mass matrix M is an identity matrix I (eqn 3.14).

For the same set of parameters considered in the point displacement history case, kinetic energy dynamics of the system is plotted in figs 4.10 and 4.11. As expected, the mean kinetic energy of the system shows a gradual decline with time for pre-flutter \mathcal{U} ; the opposite happens for post-flutter \mathcal{U} .

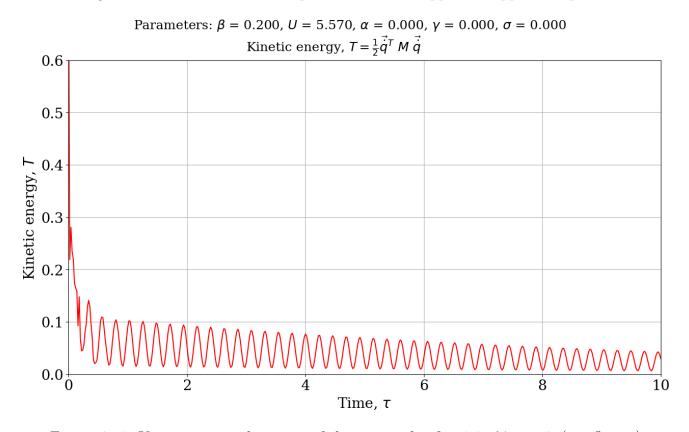


Figure 4.10: Kinetic energy dynamics of the system for $\beta = 0.2$, $\mathcal{U} = 5.57$ (pre-flutter)

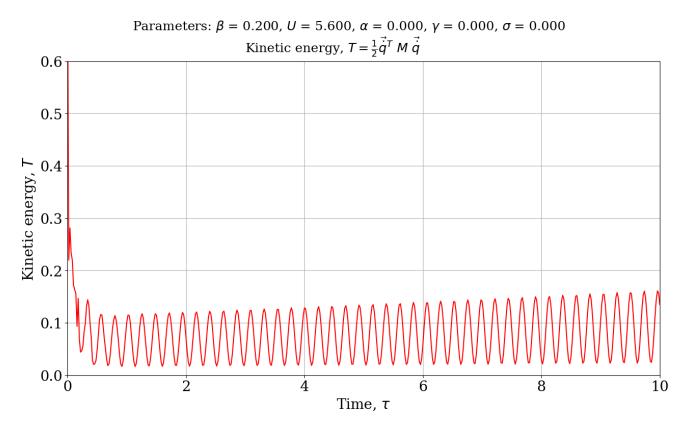


Figure 4.11: Kinetic for $\beta=0.2,~\mathcal{U}=5.6$ (post-flutter)

CHAPTER 5	
1	
	CONCLUSION

We draw the following major conclusions from the linear analysis of cantilevered pipe converying fluid

- Influence of mass ratio β : The variation of complex frequency with flow velocity \mathcal{U} for various β was investigated neglecting gravitational and dissipation effects. For low \mathcal{U} , all modes experienced damping while at least one mode leads to flutter at higher \mathcal{U} . The flutter flow velocity \mathcal{U}_f saw an increase with increasing β , in general, except for some intervals for β which saw two possible values of \mathcal{U}_f . This happens because of the system dynamics forming 'instability-restabilization-instability' sequence. Flutter occurred via different coupled modes for different β .
- Influence of gravitational parameter γ : Neglecting dissipation effects, it was observed that \mathcal{U}_f increased for the same β as γ was increased, improving the system's stability.
- Influence of external dissipation σ : With γ and α set to zero, increasing σ improves the stability of the system for lower β , however at higher β , destabilization of the system takes place. Increase in σ has negligible effect on the intermediate β .
- Influence of internal dissipation α : Once γ and α are set to zero, increasing Kelvin-Voigt dissipation factor α improves the stability of the system for lower β . For a brief interval β thereafter and again at higher β , the system gets destabilized. Increase in α has negligible effect on the intermediate β .
- Response to velocity impulse input: The cantilevered pipe system was subjected to a velocity impulse input at the tip for $\beta = 0.2$. The displacement history at the tip was recorded for two values of \mathcal{U} , one which was less than the corresponding \mathcal{U}_f and another which was greater. The pre-flutter \mathcal{U} showed a decaying mean motion while the other a growing one, which is expected. A similar behaviour was observed for the kinetic energy dynamics of the cantilevered pipe system.

Additional resources

The code used for the analysis can be downloaded from my GitHub repository [8].



- [1] Paidoussis, Michael P., Li, G. X. (1993), "Pipes conveying fluid: A model dynamical problem", Jour of Fluids and Structures 7, 137-204
- [2] Paidoussis, Michael P., Issid, N. T. (1974), "Dynamic stability of pipes conveying fluid", Jour of Sound and Vibration 33 (3), 267-294
- [3] Paidoussis, Michael P. (2014), Fluid-Structure Interactions: Slender Structures and Axial Flow Volume 1, Academic Press, Oxford, UK
- [4] Meirovitch, Leonard (2001), Fundamentals of Vibrations, McGraw-Hill, Singapore
- [5] Gregory, R. W., Paidoussis, Michael P. (1966), "Unstable oscillation of tubular cantilevers conveying fluid I: Theory", *Proceedings of the Royal Society (London)* 293, 512-527
- [6] Scientific Python documentation (2020), https://docs.scipy.org/doc/scipy/reference/tutorial/integrate.html
- [7] Python Control Systems Library (2020), http://www.python-control.org
- [8] Avatar, G. R. Krishna Chand (2021), "Python code for linear dynamics of a cantilevered pipe conveying fluid", https://github.com/kcavatar/cantilevered-pipe-conveying-fluid

Appendices

APPENDIX A

_DERIVATION OF CANTILEVER BEAM MODAL FUNCTIONS

Consider the following non-dimensional equation of a cantilever beam

$$\ddot{\eta} + \eta'''' = 0 \tag{A.1}$$

Introduce a solution of the form [4]

$$\eta(\xi, \tau) = q(\tau)\phi(\xi)$$

On substituting the above expression into eqn A.1, we have

$$\ddot{q}\phi + q\phi'' = 0$$

$$-\frac{\ddot{q}}{q} = \frac{\phi''''}{\phi} = k \text{ (constant)}$$
(A.2)

For harmonic solution, we must have $k = \omega^2$ and so

$$\phi'''' = \omega^2 \phi$$

$$\implies \phi'''' - \omega^2 \phi = 0 \tag{A.3}$$

Takiing $\lambda^4 = \omega^2$, we have

$$\phi'''' - \lambda^4 \phi = 0 \tag{A.4}$$

The eqn A.4 accepts a solution of the form

$$\phi(\xi) = A\cosh(\lambda\xi) + B\cos(\lambda\xi) + C\sinh(\lambda\xi) + D\sin(\lambda\xi)$$
(A.5)

The boundary conditions for the cantilever beam are

$$\phi(\xi = 0) = \phi(\xi = 0) = \phi''(\xi = 1) = \phi'''(\xi = 0) = 0 \tag{A.6}$$

Applying the first boundary condition (b.c.) given in eqn A.6 to eqn A.5, we have

$$0 = A + B$$
$$B = -A \tag{A.7}$$

Applying the second b.c. given in eqn A.6,

$$\phi(\xi) = \lambda(A\sinh(\lambda\xi) - B\sin(\lambda\xi) + C\cosh(\lambda\xi) + D\cos(\lambda\xi))$$

$$\implies 0 = \lambda(C+D)$$

$$\implies D = -C \tag{A.8}$$

Applying the third b.c., $\phi''(\xi = 1) = 0$, given in eqn A.6, and using eqns A.7 and A.8

$$\phi''(\xi) = \lambda^2 (A \cosh(\lambda \xi) - B \cos(\lambda \xi) + C \sinh(\lambda \xi) - D \sin(\lambda \xi))$$

$$\implies 0 = \lambda^2 (A \cosh(\lambda) - B \cos(\lambda) + C \sinh(\lambda) - D \sin(\lambda))$$

$$\implies 0 = A(\cosh(\lambda) + \cos(\lambda)) + C(\sinh(\lambda) + \sin(\lambda))$$

$$\implies \frac{C}{A} = -\frac{(\cosh(\lambda) + \cos(\lambda)}{(\sinh(\lambda) + \sin(\lambda))}$$
(A.9)

Applying the fourth b.c., $\phi'''(\xi = 1) = 0$, given in eqn A.6, and using eqns A.7 and A.8

$$\phi'''(\xi) = \lambda^{3} (A \sinh(\lambda \xi) + B \sin(\lambda \xi) + C \cosh(\lambda \xi) - D \cos(\lambda \xi))$$

$$\implies 0 = \lambda^{3} (A \sinh(\lambda) + B \sin(\lambda) + C \cosh(\lambda) - D \cos(\lambda))$$

$$\implies 0 = A(\sinh(\lambda) - \sin(\lambda)) + C(\cosh(\lambda) + \cos(\lambda))$$

$$\implies \frac{C}{A} = -\frac{(\sinh(\lambda) - \sin(\lambda))}{(\cosh(\lambda) + \cos(\lambda))}$$
(A.10)

From eqns A.9 and A.10,

$$\frac{(\cosh(\lambda) + \cos(\lambda))}{(\sinh(\lambda) + \sin(\lambda))} = \frac{(\sinh(\lambda) - \sin(\lambda))}{(\cosh(\lambda) + \cos(\lambda))}$$

$$\implies \cosh^{2}(\lambda) + \cos^{2}(\lambda) + 2\cosh(\lambda)\cos(\lambda) = \sinh^{2}(\lambda) - \sin^{2}(\lambda)$$

$$\implies \cosh^{2}(\lambda) - \sinh^{2}(\lambda) + \cos^{2}(\lambda) + \sin^{2}(\lambda) + 2\cosh(\lambda)\cos(\lambda) = 0$$

$$\implies 2 + 2\cosh(\lambda)\cos(\lambda) = 0$$

$$\implies 1 + \cosh(\lambda)\cos(\lambda) = 0 \tag{A.11}$$

The transcendental equation A.11 is the characteristic equation of the cantilever beam. The roots of eqn A.11 gives the modal frequencies $\omega_r = \lambda_r^2$ satisfying

$$1 + \cosh(\lambda_r)\cos(\lambda_r) = 0$$
 $r = 1, 2, \dots$

Using eqns A.7 and A.8, we have the following expression for the $r^{\rm th}$ modal function A.5

$$\phi_r(\xi) = A \left(\cosh(\lambda_r \xi) - \cos(\lambda_r \xi) \right) + C \left(\sinh(\lambda_r \xi) - \sin(\lambda_r \xi) \right) \qquad r = 1, 2, \dots$$
$$= A_r \left[\cosh(\lambda_r \xi) - \cos(\lambda_r \xi) + \frac{C_r}{A_r} \left(\sinh(\lambda_r \xi) - \sin(\lambda_r \xi) \right) \right] \qquad r = 1, 2, \dots$$

We could use any one of eqns A.7 and A.8 to substitute for $\frac{C_r}{A_r}$. Picking $\frac{C_r}{A_r} = -\frac{(\sinh(\lambda_r) - \sin(\lambda_r))}{(\cosh(\lambda_r) + \cos(\lambda_r))}$, we have the r^{th} modal function

$$\phi_r(\xi) = A_r \left[\cosh(\lambda_r \xi) - \cos(\lambda_r \xi) - \frac{(\sinh(\lambda_r) - \sin(\lambda_r))}{(\cosh(\lambda_r) + \cos(\lambda_r))} \left(\sinh(\lambda_r \xi) - \sin(\lambda_r \xi) \right) \right] \qquad r = 1, 2, \dots$$
(A.12)

We normalize the above expression so that A_r is no longer arbitrary as

$$\int_0^1 \phi_r^2(\xi) \ d\xi = 1 \qquad r = 1, 2, \dots$$

Orthogonality of modal functions The normalized modal functions are orthonormal such that

$$\int_0^1 \phi_r(\xi)\phi_s(\xi) \ d\xi = \delta_{rs} \qquad r, s = 1, 2, \dots$$

where the Kronecker delta $\delta_{rs} = 1$ if r = s and $\delta_{rs} = 0$ if $r \neq s$